

OAK RIDGE NATIONAL LABORATORY

operated by

UNION CARBIDE CORPORATION NUCLEAR DIVISION



for the U.S. ATOMIC ENERGY COMMISSION

ORNL - TM - 2724

MASTER

COMPATIBILITY OF MOLYBDENUM-BASE ALLOY TZM, WITH

 $LiF-BeF_2-ThF_4-UF_4$ (68-20-11.7-0.3 mole %) at 1100°C

J. W. Koger and A. P. Litman

P3520

NOTICE This document contains information of a preliminary nature and was prepared primarily for internal use at the Oak Ridge National Laboratory. It is subject to revision or correction and therefore does not represent a final report.

— LEGAL NOTICE —

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

- A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or
- B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

Contract No. W-7405-eng-26

METALS AND CERAMICS DIVISION

-LEGAL NOTICE-

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

COMPATIBILITY OF MOLYBDENUM-BASE ALLOY TZM WITH LiF-BeF₂-ThF₄-UF₄ (68-20-11.7-0.3 mole %) at 1100°C

J. W. Koger and A. P. Litman

DECEMBER 1969

OAK RIDGE NATIONAL LABORATORY Oak Ridge, Tennessee operated by UNION CARBIDE CORPORATION for the U.S. ATOMIC ENERGY COMMISSION

To Chelle alli Off off all to Chille had be hear Make o

• ...

CONTENTS

<u></u>	Page
Abstract	l
Introduction	1
Experimental Procedure	2
Results and Discussion	3
Salt Analysis	3
Weight Changes	3
X-Ray Fluorescence and Microprobe Analysis	4
Microstructural Changes	4
Recrystallization	5
Strength	8
Corrosion Reactions and Kinetics	9
Conclusions	11
Acknowledgments	12

				•
				•
				•
				-
			•	
		•		_

COMPATIBILITY OF MOLYBDENUM-BASE ALLOY TZM WITH LiF-BeF₂-ThF₄-UF₄ (68-20-11.7-0.3 mole %) at 1100°C

J. W. Koger and A. P. Litman

ABSTRACT

The TZM alloy (Mo-0.5% Ti-0.08% Zr-0.02% C) showed a very small amount of attack by the fused fluoride salt (LiF-BeF₂-ThF₄-UF₄, 68-20-11.7-0.3 mole %) at 1100°C for 1011 hr. Corrosion manifested itself as leaching of titanium and possibly zirconium from the alloy. The TZM alloy exposed to the salt partially recrystallized, while that exposed to the vapor did not. This recrystallization was attributed to the removal of titanium and zirconium. On the basis of this single test the magnitude and mechanism of corrosion indicate no serious problems for long-term use of TZM in the vacuum distillation processing scheme for the Molten Salt Breeder Reactor. However, the strength properties of the TZM alloy would approach those of unalloyed molybdenum as salt exposure time increased; this is not considered a problem now.

INTRODUCTION

The current success of the Molten Salt Reactor Experiment at ORNL has stimulated work on a thermal Molten Salt Breeder Reactor (MSBR). 1 One of the requirements for a successful MSBR system will be the continuous reconditioning of the fuel salt to remove unwanted fission products. A possibility under study for one step of the salt reprocessing is vacuum distillation. 2 Uranium would be stripped from the fuel salt, and the remaining salt would be distilled at 1000°C and 2 torr. The diluents of the fuel salt, lithium and beryllium fluorides, would distil readily and leave behind the rare-earth and alkaline-earth fission products. This process has been demonstrated in laboratory experiments and with some radioactive salt from the MSRE. 2

¹M. W. Rosenthal et al., MSR Program Semiann. Progr. Rept. Aug. 31, 1968, ORNL-4344, pp. 53-108.

²J. R. Hightower and L. E. McNeese, MSR Program Semiann. Progr. Rept. Aug. 31, 1968, ORNL-4344, pp. 306-308.

The strength and corrosion resistance required of a container material for the high-temperature vacuum distillation step eliminate most conventional alloys from consideration. Our preliminary survey disclosed that certain refractory alloys, particularly molybdenum-base materials, may be suitable for this special service. The alloy TZM (Mo-0.5% Ti-0.08% Zr-0.02% C) was selected for an initial experiment because it is stronger and usually more fabricable than pure molybdenum. Accordingly, the experiment reported here provides a preliminary test of the compatibility of TZM alloy with a typical fertile-fissile salt (LiF-BeF₂-ThF₄-UF₄, 68-20-11.7-0.3 mole %) at 1100°C. This salt is a strong candidate for the single-fluid MSBR now being designed. No tests were specifically conducted to determine the strength properties of TZM alloy, but conditions caused by the exposure to the salt that could affect the strength were noted.

EXPERIMENTAL PROCEDURE

The experimental system used for this study consisted of a simple capsule fabricated of cold-worked TZM alloy, containing specimens of the same alloy, and shown in Fig. 1. Note that the specimens were located in the salt, at the salt-vapor interface, and in the vapor. The purified salt (60~g) was supplied by the Fluoride Processing Group of the Reactor Chemistry Division. Purification involved sparging with an HF-H₂ mixture at 600° C to remove oxides and sulfides and stripping with H₂ at 700° C to remove metallic impurities. The loading operation, which consists of introducing the fluoride salt into the capsule, welding the test capsule, and sealing the outer Inconel protective container, was carried out in an inert-gas atmosphere chamber containing argon purer than 99.995%.

After being tested in the position shown in Fig. 1 for 1011 hr at 1100° C, the capsule was removed from the furnace, inverted to keep the specimens out of the salt, and quenched in liquid nitrogen to retain high-temperature corrosion products. After test, weight changes of the specimens were determined, the salt was analyzed for impurities, and the specimens and capsules were analyzed by x-ray fluorescence and examined metallographically.

ORNL-DWG 69-10034

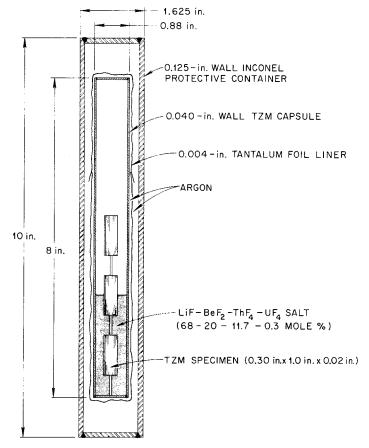


Fig. 1. Schematic Drawing of Corrosion Test Capsule Used to Study Compatibility of TZM Alloy with a Fused Fluoride Salt.

RESULTS AND DISCUSSION

Salt Analysis

Concentrations of the constituents of the salt and its impurities before and after test are given in Table 1. During the experiment titanium, zirconium, and chromium concentrations in the salt increased and that of iron decreased. The titanium and zirconium are intentional alloying additions, but chromium is an unwanted impurity.

Weight Changes

The specimens exposed to the salt showed small (0.5 mg/cm^2) weight gains, and the one exposed to the vapor did not change weight measurably.

Table 1. Chemical Analysis of Fertile-Fissile Salt Exposed to TZM Alloy Capsule for 1011 hr at 1100°C (2010°F)

Constituent	Content, ppm		Constituent	Content, wt %		
	Before	After	COIIS DI CACITO	Before	After	
Mo	< 5	< 10	Li	6.71	7.01	
\mathtt{Zr}	37	134	Ве	2.65	2.55	
Ti	74	151	Th	43.1	42.6	
Fe	80	38	U	1.75	1.93	
\mathtt{Cr}	20	97	F	45.5	45.7	
0	58	< 50				
H ₂ O	40	70				

X-Ray Fluorescence and Microprobe Analysis

Table 2 gives the concentrations of the major elements in the TZM alloy as determined by x-ray fluorescence before and after test. Iron was found on the surface and probably caused a major portion of the weight gains, but no quantitative value was obtained. Significantly, the quantitative analysis shows a decrease in titanium concentration, no significant change in zirconium concentration, and a corresponding increase in the concentration of molybdenum after exposure to the salt. Care must be taken in interpreting these results, since the sensitivity of the fluorescence analysis is questionable at these low concentrations and iron was deposited over the surface. The electron microprobe analysis showed 0.3% Ti on the surface and 0.5% Ti in the matrix. zirconium content was about 0.1% in all portions of the specimen. changes at the level of 0.1% are beyond the limit of detection of the instrument. However, these results agree reasonably with the increase in concentration of certain alloying elements in the salt and are in accord with the proposed corrosion mechanism(s). (See Corrosion Reactions and Kinetics.)

Microstructural Changes

Figure 2(a) shows the typical cold-worked structure of the specimens and capsule before test. This figure is also typical of the specimen

Table 2. Concentration of Alloying Elements in TZM Alloy Specimen Before and After Exposure to a Fertile-Fissile Salt at 1100°C for 1011 hr, as Determined by X-Ray Fluorescence Analysis^a

Sample Analyzed		Content, wt %	<u> </u>	
sampre maryzea	Мо	$Z\mathbf{r}$	Ti	
Untested alloy	99.4	0.08	0.5	
Exposed specimens in vapor at interface in salt	99.8 99.87 99.90	0.08 0.09 0.08	0.1 0.04 0.013	

^aThe analysis disclosed substantial iron on the alloy surface after test, but iron was not considered in determining the quantities above.

exposed to the vapor, where no microstructural change occurred. An unetched specimen, Fig. 2(b), exposed to the salt shows no attack at the surface. The same specimen etched, Fig. 2(c), shows recrystallization for a maximum depth of about 0.004 in. Examination of this specimen at a lower magnification, Fig. 2(d), shows that both surfaces recrystallized as the result of test. The inside capsule wall also recrystallized in the same manner.

Recrystallization

In view of the microstructural and chemical changes induced in the TZM alloy by this test, we compared reported recrystallization temperatures for molybdenum and TZM alloy (Table 3). It is clear from the above and from general metallurgical considerations that an increase in annealing time from 1 hr to several thousand hours should lower the recrystallization temperature of TZM alloy only 100 to 200°C. Moreover the presence of as little as 0.01% of a foreign element in solid solution can raise the recrystallization temperature as much as several hundred degrees. Conversely, the removal of alloying constituents would free

³R. E. Reed-Hill, <u>Physical Metallurgy Principles</u>, Van Nostrand, Princeton, N. J., 1964, p. 198.

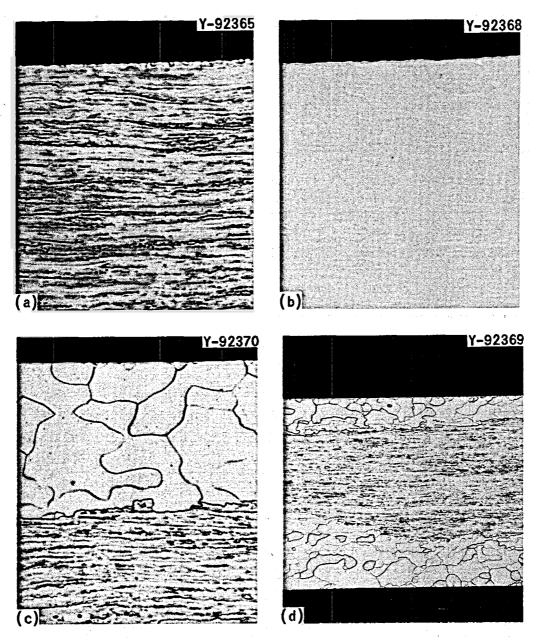


Fig. 2. TZM Alloy Exposed to Fertile-Fissile Salt, LiF-BeF₂-ThF₄-UF₄ (68-20-11.7-0.3 mole %) for 1011 hr at 1100°C. (a) Typical cold-worked structure of capsule and specimens before test; also the structure of the specimen exposed to the vapor during test. 500x. Etchant: H₂O, H₂O₂, H₂SO₄. (b) As-polished capsule and specimen exposed to salt. 500x. (c) Capsule and specimen exposed to salt. 500x. Etchant: H₂O, H₂O₂, H₂SO₄. (d) Specimen exposed to salt. 100x. Etchant: H₂O, H₂O₂, H₂SO₄.

Table 3.	Recrystallization Behavior of	Wrought, Stress-
Reli	eved, Unalloyed Molybdenum and	TZM Alloy

Alloy	Temperature (°C)	Time (hr)	Percent Recrystallization	Reference
Unalloyed Mo	1130	1	100	a
TZM	560	4400	0	ъ
TZM	1100	1	0	а
TZM	1160	4400	85	ъ
TZM	1250	4400	100	ъ
TZM	1390	1	100	a

^aB. A. Wilcox, p. 26 in <u>Refractory Metal Alloys, Metallurgy and Technology</u>, ed. by I. Machlin, R. T. Begley, and E. D. Weisert, Plenum Press, New York, 1968.

the grain boundaries and allow them to move to form new grains. Thus, the enhanced recrystallization (lower recrystallization temperature) in the samples and capsule of this experiment is due primarily to the removal of the titanium and possibly zirconium from the molybdenum matrix. This is further substantiated by the lack of recrystallization in the samples exposed to the vapor, where the composition changed much less.

The addition of carbon and one or more group IV-A elements to molybdenum greatly increases the recrystallization temperature.⁴ Thus, carbon removal from the alloy should likewise change recrystallization behavior. However, carbon analyses show no difference (about 0.035% C in each) between exposed and unexposed TZM samples, so this effect is very small or absent. Although carbon mass transport is common in liquid metal systems, especially alkali metals, it is not considered a problem in fused fluoride systems.

^bD. H. Jansen, Fuels and Materials Development Program Quart. Progr. Rept. Sept. 30, 1968, ORNL-4350, pp. 107-111, and private communication.

⁴W. H. Chang, <u>A Study of the Influence of Heat Treatment on Microstructure and Properties of Refractory Alloys</u>, ASD-TDR-62-211 (April 1962).

Strength

The molybdenum-base TZM alloy is about the best documented refractory alloy in which base metal strength is improved by precipitation hardening. This alloy is strengthened by the formation of fine carbides of titanium and zirconium as well as by cold working, and its ultimate tensile strength is double or triple that of unalloyed molybdenum. The 100-hr rupture strength of TZM at 1100° C is also much greater than that of molybdenum. Thus, as much more difficult to fabricate than commercial alloys and many refractory alloys, it is usually much easier to work than unalloyed molybdenum. Thus, as an engineering material TZM has many advantages over molybdenum.

Comparing the strength and ductility of wrought, stress-relieved, and recrystallized TZM, Wilcox et al. 6 noted a significant increase in yield and ultimate strengths due to working at test temperatures of 1200 to 1300°C. At 1550°C after recrystallization of the wrought sample there was relatively little difference in the materials. However, at 1100°C, the temperature of our capsule test, Wilcox's recrystallized alloy had much lower strength than the wrought alloy. Thus, the use of a stress-relieved TZM alloy for conditions given in this experiment should also be considered.

Although TZM would generally be favored over molybdenum for the previous reasons, through the loss of its alloying elements (titanium and zirconium) during exposure to the fused fluoride salt the composition and the strength properties of the cold-worked TZM approach those of unalloyed recrystallized molybdenum. Although unalloyed molybdenum or recrystallized TZM is weaker than the initial cold-worked material, the strength of the exposed material would probably be ample for the loads proposed in the MSBR vacuum distillation system. However, before the depleted TZM is used, it should be tested to more carefully define

⁵T. E. Tietz and J. W. Wilson, <u>Behavior and Properties of Refractory Metals</u>, Stanford University Press, California, 1965, pp. 156-205.

⁶B. A. Wilcox, A. Gilbert, and B. C. Allen, <u>Intermediate Temperature</u> <u>Ductility and Strength of Tungsten and Molybdenum TZM</u>, <u>AFMI-TR-66-89</u> (April 1966).

the strength properties of the recrystallized material. An advantageous trade-off with these mechanical property changes is, of course, that pure molybdenum is more resistant than TZM to the fluoride salts of interest to the MSRP. Thus, several benefits come from fabricating the system with TZM while others accrue from the "conversion" of TZM to molybdenum during the fluoride salt exposure.

Corrosion Reactions and Kinetics

In fluoride salt systems one of the major corrosion reactions is the oxidation of one of the constituents of the container alloy by the reduction of a less stable impurity metal fluoride initially in the salt, for example

$$Cr + FeF_2 \rightarrow CrF_2 + Fe$$
 . (1)

The reduced metal substitutes for the oxidized metal on the container material. This type of reaction apparently occurred in our experiment involving the strong reducing agents titanium and zirconium:

$$Ti + FeF_2 \rightarrow TiF_2 + Fe$$
, (2)

$$Zr + 2FeF_2 \rightarrow ZrF_4 + 2Fe$$
 (3)

The reported⁸ free energy changes for the reactions shown by Eqs. (1), (2), and (3) are strongly negative, and Eqs. (2) and possibly (3) seem to be indicated by the results reported above. As noted earlier, the iron metal that formed in these reactions deposited in thin layers on the container and specimens.

⁷W. R. Grimes, G. M. Watson, J. H. DeVan, and R. B. Evans, "Radio-Tracer Techniques in the Study of Corrosion by Molten Fluorides," pp. 559-574 in Conference on the Use of Radioisotopes in the Physical Sciences and Industry, September 6-17, 1960, Proceedings, Vol. III, International Atomic Energy Agency, Vienna, 1962.

⁸A. Glassner, The Thermochemical Properties of the Oxides, Fluorides, and Chlorides to 2500°K, ANL-5750 (1957).

Alternatively the fuel salt corrosion reactions in which UF_4 is reduced to UF_3 also may have occurred to remove titanium and zirconium from the alloy:

$$Ti + 2UF_4 \rightarrow TiF_2 + 2UF_3 , \qquad (4)$$

$$Zr + 4UF_4 \rightarrow ZrF_4 + 4UF_3$$
 (5)

However, no data with which to determine the extent of these reactions are available.

Assuming that the removal of the elements from the TZM was controlled by solid-state diffusion, one can calculate from the increase of the titanium and zirconium in the salt the apparent diffusion coefficients of titanium and zirconium in the TZM alloy. From these one can estimate the amount of those materials that would be removed at different times and temperatures. In regard to the zirconium removal, we feel that the salt analysis is correct and that the instruments involved in the fluorescence and microprobe analyses are not sufficiently sensitive to measure the movement of the zirconium.

The total amount of material, $\mathbf{M}_{\!t}$, that diffuses from the alloy held under isothermal conditions with a zero surface concentration is given by 9

$$M_{t} = 2C_0 \sqrt{Dt/\pi} , \qquad (6)$$

where

 C_0 = the concentration of the diffusing element,

D = the diffusion coefficient, and

t = the time.

We calculated D = 1.2×10^{-12} cm²/sec for titanium in TZM and 2.9×10^{-11} cm²/sec for zirconium in TZM at 1100° C. We did not calculate for chromium removal, as its concentration fluctuated from sample to sample and we could not assume that it was distributed homogeneously through the alloy.

⁹J. Crank, <u>The Mathematics of Diffusion</u>, Clarendon Press, Oxford, England, 1956, p. 11.

The expression

$$t \sim X^2/D$$
, (7)

where X is the distance of composition change, is very useful in calculating approximately whether the composition has changed appreciably by diffusion under a given set of circumstances. For example, we can calculate the time required for appreciable removal — concentration between the initial and ultimate concentrations — of the diffusing element at a certain distance from the surface.

From the calculated diffusion coefficients and the experimental time of 1011 hr, we find the depths of removal of titanium and zirconium, respectively, are 0.0008 and 0.0040 in. Since the microstructures show recrystallization for a distance of about 0.004 in., we may assume that the calculated diffusion coefficient for zirconium may be more accurate than that for titanium — that is, the salt analysis for the titanium may be somewhat in error. Extrapolation of the calculated values shows that it would require 4000 hr to recrystallize an additional 0.004 in. of material. This illustrates the decrease of the corrosion rate with time and the general usefulness of TZM alloy for MSR reprocessing service.

CONCLUSIONS

- l. This test showed negligible corrosion of the TZM alloy by the fused fluoride salt (LiF-BeF₂-ThF₄-UF₄, 68-20-11.7-0.3 mole %) at 1100°C for over 1000 hr.
- 2. Corrosion manifested itself as leaching of titanium and possibly zirconium from the alloy. FeF₂ initially present in the salt oxidized the alloying elements to fluorides dissolved in the salt bath. The iron metal resulting from the reaction deposited in thin layers on the specimens and container. We found that D_{Ti} and D_{Zr} were 1.2 \times 10⁻¹² and 2.9 \times 10⁻¹¹ cm²/sec, respectively, at 1100°C in the alloy.
- 3. The TZM alloy exposed to the salt partially recrystallized, while the TZM alloy simultaneously exposed to the vapor did not. This recrystallization was attributed to the removal of titanium and zirconium.

4. On the basis of this single test, the magnitude and mechanism of corrosion indicate no serious problems for long-term use of TZM alloy in the MSBR vacuum distillation processing scheme. However, the strength properties of the TZM alloy would approach those of unalloyed molybdenum as salt exposure time increased.

ACKNOWLEDGMENTS

It is our pleasure to acknowledge the assistance of F. D. Harvey, E. J. Lawrence, and J. B. Phillips with these experiments. We are also indebted to J. R. DiStefano, W. O. Harms, and H. E. McCoy, Jr., for their constructive review of the manuscript.

Thanks also go to H. R. Gaddis of the Metallography Group,
Harris Dunn and other members of the Analytical Chemistry Division, the
Graphic Arts Department, and the Metals and Ceramics Division Reports
Office for invaluable assistance.

INTERNAL DISTRIBUTION

1-3.	Central Research Library	58.	W.	R.	Cobb
4-5.	ORNL - Y-12 Technical Library	59.	Η.	\mathbb{D} .	Cochran
	Document Reference Section	60.	N.	C.	Cole
6-15.	Laboratory Records Department	61.	C.	W.	Collins
16.	Laboratory Records, ORNL RC	62.	Ε.	L.	Compere
17.	ORNL Patent Office	63.	Κ.	٧.	-
18.	R. K. Adams	64.	W.	н.	Cook
19.	G. M. Adamson, Jr.	65.	L.	т.	Corbin
20.	R. G. Affel	66.	В.	Co	x
21.	L. G. Alexander	67.	J.	L.	Crowley
22.	J. L. Anderson	68.			Culler
23.	R. F. Apple	69.	D.	R.	Cuneo
24.	C. F. Baes	70.	J.	Ε.	Cunningham
25.	J. M. Baker	71.	J.	M.	_
26.	S. J. Ball	72.	D.		Davis
27.	C. E. Bamberger	73.	R.		DeBakker
28.	W. P. Barthold	74.	J.		DeVan
29.	C. J. Barton	75.			Ditto
30.	H. F. Bauman	76.	A.		Dworkin
31.	S. E. Beall	77.			Dudley
32.	R. L. Beatty	78.	W.		Eatherly
33.	M. J. Bell	79.	J.		Engel
34.	M. Bender	80.	E.		Epler
35.	C. E. Bettis	81.	R.		Evans III
36.	E. S. Bettis	82.			Federer
37 .	D. S. Billington	83.	D.		Ferguson
38.	R. E. Blanco	84.			Ferris
39.	F. F. Blankenship	85.	В.		eischer
40.	J. O. Blomeke	86.			Fraas
41.	R. Blumberg	87.			Friedman
42.	E. G. Bohlmann	88.			Frye, Jr.
43.	C. D. Bopp	89.	W.		Furlong
44.	C. J. Borkowski	90.	C.		Gabbard
45.	G. E. Boyd	91.	R.	В.	Gallaher
46.	J. Braunstein	92.	R.	Ε.	Gehlbach
47.	M. A. Bredig	93.	J.	Η.	Gibbons
48.	R. B. Briggs	94.	L.	0.	Gilpatrick
49.	H. R. Bronstein	95.	н.	E.	Goeller
50.	G. D. Brunton	96.	W.	R.	Grimes
51.	D. A. Canonico	97.	A.	G.	Grindell
52.	S. Cantor	98.	R.	W.	Gunkel
53.	W. L. Carter	99.	R.	н.	Guymon
54.	G. I. Cathers	100.	J.	P.	Hammond
55.	O. B. Cavin	101.	В.	Α.	Hannaford
56.	J. M. Chandler	102.	P.	н.	Harley
57.	F. H. Clark	103.			Harman

104	. W. O. Harms	175.	R. E. MacPherson
105	. C. S. Harrill	176.	J. C. Mailen
106	. F. D. Harvey	177.	D. L. Manning
107	. P. N. Haubenreich	178.	C. D. Martin
108	. F. A. Heddleston	179.	W. R. Martin
109		180.	H. V. Mateer
110		181.	C. E. Mathews
111		182.	T. H. Mauney
112		183.	H. McClain
113-115	<u> </u>	184.	R. W. McClung
116			_
		185.	H. E. McCoy, Jr.
117		186.	H. F. McDuffie
118		187.	D. L. McElroy
119		188.	
120		189.	
121		190.	L. E. McNeese
122	. W. R. Huntley	191.	J. R. McWherter
123	. H. Inouye	192.	H. J. Metz
124	. D. H. Jansen	193.	A. S. Meyer
125	. W. H. Jordan	194.	R. L. Moore
126	. P. R. Kasten	195.	D. M. Moulton
127		196.	T. W. Mueller
128		197.	H. A. Nelms
129	ŭ	198.	H. H. Nichol
130	· · · · · · · · · · · · · · · · · · ·	199.	
131	· · · · · · · · · · · · · · · · · · ·	200.	E. L. Nicholson
132		200.	L. C. Oakes
133			
	ŭ	202.	P. Patriarca
134	1 0	203.	A. M. Perry
135		204.	J. B. Phillips
136		205.	T. W. Pickel
137		206.	H. B. Piper
138–147)	207.	B. E. Prince
148	v	208.	G. L. Ragan
149		209.	J. L. Redford
150	. T. S. Kress	210.	M. Richardson
151	. J. W. Krewson	211.	G. D. Robbins
152	. C. E. Lamb	212.	R. C. Robertson
153	. J. A. Lane	213.	H. C. Roller
154	. C. E. Larson		R. A. Romberger
1 55	. E. J. Lawrence	215-216.	M. W. Rosenthal
156		217.	R. G. Ross
157			H. C. Savage
158-167		219.	W. F. Schaffer
168		220.	A. C. Schaffhauser
169	· · · · · · · · · · · · · · · · · · ·	221.	
170	σ,		Dunlap Scott
			_
171		223.	
172			H. E. Seagren
173			C. E. Sessions
174	H. G. MacPherson	226.	J. H. Shaffer

227. W. H. Sides G. M: Slaughter 228. 229. A. N. Smith 230. F. J. Smith 231. G. P. Smith 232. O. L. Smith 233. P. G. Smith 234. W. F. Spencer 235. I. Spiewak 236. R. C. Steffy 237. R. L. Stephenson 238. W. C. Stoddart 239. H. H. Stone 240. R. A. Strehlow 241. D. A. Sundberg 242. J. R. Tallackson 243. E. H. Taylor 244. W. Terry 245. R. E. Thoma 246. P. F. Thomason 247. L. M. Toth

248. D. B. Trauger

249. W. E. Unger R. L. Wagner 250. 251. G. M. Watson 252. J. S. Watson 253. H. L. Watts 254. C. F. Weaver 255. B. H. Webster 256. A. M. Weinberg 257. J. R. Weir, Jr. 258. W. J. Werner K. W. West 259. 260. M. E. Whatley 261. J. C. White 262. R. P. Wichner 263. L. V. Wilson 264. Gale Young 265. H. C. Young 266. J. P. Young 267. E. L. Youngblood

268. F. C. Zapp

269. MSRP Director's Office

EXTERNAL DISTRIBUTION

- G. G. Allaria, Atomics International 270. 271. J. G. Asquith, Atomics International
- 272-273. D. F. Cope, RDT, SSR, AEC, Oak Ridge National Laboratory
 - 274. C. B. Deering, OSR, AEC, Oak Ridge National Laboratory
 - 275. A. R. DeGrazia, RDT, AEC, Washington
 - H. M. Dieckamp, Atomics International 276.
 - David Elias, RDT, AEC, Washington 277.
 - J. E. Fox, RDT, AEC, Washington 278.
 - A. Giambusso, AEC, Washington 279.

 - 280. Norton Haberman, RDT, AEC, Washington
 - F. D. Haines, AEC, Washington 281.
 - C. E. Johnson, AEC, Washington 282.
 - 283. W. L. Kitterman, AEC, Washington
 - W. J. Larkin, AEC, Oak Ridge Operations 284.
 - Kermit Laughon, RDT, OSR, AEC, Oak Ridge National Laboratory 285.
- T. W. McIntosh, AEC, Washington 286-287.
 - A. B. Martin, Atomics International 288.
 - 289. D. G. Mason, Atomics International
 - C. L. Matthews, RDT, OSR, AEC, Oak Ridge National Laboratory 290.
 - 291. G. W. Meyers, Atomics International
 - 292. D. E. Reardon, AEC, Canoga Park Area Office
 - D. R. Riley, RDT, AEC, Washington 293.
 - H. M. Roth, AEC, Oak Ridge Operations 294.
 - M. Shaw, AEC, Washington 295.
 - J. M. Simmons, RDT, AEC, Washington 296.

- 297. W. L. Smalley, AEC, Washington
- 298. S. R. Stamp, AEC, Canoga Park Area Office
- 299. E. E. Stansbury, The University of Tennessee
- 300. R. F. Sweek, AEC, Washington
- 301. A. Taboada, AEC, Washington
- 302. R. F. Wilson, Atomics International
- 303. Laboratory and University Division, AEC, Oak Ridge Operations
- 304-318. Division of Technical Information Extension